MECHANICAL & ELECTRICAL KEY

POWER		Ceiling Recessed Light	Dimmer Switch	Smoke Detector (mains with alarm linkage to BS5839)	External wall mounted heater
5A	Single 5-Amp lighting socket	Automatic Light	Automatic Velux Switch	Heat Detector (mains with alarm linkage to BS5839)	Towel Radiator: Hot water circuit with summer Kit
DSSO	Double Switched Socket Outlet	LED Strip Light	**WATER SUPPLY**	Iinstall client supplied wall speaker	Underfloor heating (water-based)
DSSO	Double Switched Floor Socket Outlet	Square LED low level wall lights	External Water Tap	Telephone	Underfloor heating (electric-based)
		S&F SPIKE light	**VENTILATION**	TV / Satellite Point	**MISCELLANEOUS**
C7	CAT7 Socket	Install client supplied wall Light	Extract Fan	PIR First fix for Banham	Mf Megaflow
ASP	Shaver Point	Mirror with integrated lighting	Supply Fan	House alarm	WM DR Washing Machine/Dryer
F	Electricity fuse board	**SWITCHING**	Pump	House alarm control panel	DW Dishwasher
LIGHTING		Switch	**COMMUNICATION**	**HEATING INSTALLATION**	OV Oven
	Install client supplied pendant Light	2-way Switch	Install client supplied Ring Door Bell	B Boiler	Acco drain
R	Directional Recessed Light	3-way Switch	Fire Alarm	S&F white Rad with therm valves	Iinstall client supplied ceiling speaker

When pricing 2nd fix alow client £25 per point to spend

ELECTRICAL WIRING
- All MEL points shown especially switches and sockets are identified in their principle positions (due to symbol size)
- All first fixes are to be agreed with Architect prior to final installation.
- All electrical wiring apart from the fire alarm installation will be carried out in a wiring system to the requirements of the Fire and Local Authorities and will be installed to meet the latest IEE Regulations and to comply with the requirements set out in BS5266.
- All electrical work to meet current requirements in Part P and must be designed, installed and tested by a person competent to do so.
- Internal lighting: shall have lamps that have a luminous efficiency greater than 40 lumens per circuit wall.
- External lighting: shall have a luminous efficiency greater than 40 lumens per circuit wall. Alternatively, the lamp capacity must not exceed 150W per light fitting. The lights shall be self extinguishing.
- All power points to appliances (oven, hob, freezer, boiler, controls, WM/DR etc) to be accessable switched sockets to BS requirements. Sockets for these are not shown on the layout but are deemed included where an appliance is sited.

FIRE ALARM
- The fire alarm installation will comply with the requirements of BS5839 part1.
- All wire cable and sounder points to be positioned to acheive the audibility required by the British Standard.
- All downlighters are to be 30 min. fire rating with firehoods.
- Fire hoods where specified to be as Envirograf intumescent cover DLC4 for recessed diachroic bulbs from Fire Provension Products T:01322 228270.


DRAINAGE
- All new drains to be as Hepworth flexible jointed Suer Sleeve clay pipe in a class S granular bedding with min. 100mm cover to top and bottom and concrete encased when within 300mm of the underside of the slab.
- If below the adjoining foundation and the excavation is closer than 1000mm then concrete encasement should be used to the underside of the foundation. Unless otherwise directed by the DS.
- Provide lintols where pipes pass through walls. Provide deep seal traps to all new fittings.
- Install stub stacks and air admittance valves to meet satifactory ventilation to the head of all runs
- Install base cleaning accesses to all new SVP and RWG down pipes.
- All new SVP to terminate 900mm above any ventilation opening or within 3 metres horizontally.

VENTILATION
- All new habitable rooms to have 8000mm aluminium trickle ventilators incorporated in their windows.
- New kitchen, utility, shower room / cloakrooms to have 4000mm aluminium trickle ventilators
- And have mechanical extractors to 60: 30: 15 and 6 litres/second respectively
- When fitted in windowless rooms then fans are to have a 15 min. over run.

NOTE: Rainwater drainage as existing Contractor to investigate and advise on exact outlet positions

NOTE: Drainage arrangements and boiler final position and means of ventilation subject to investigation by specialist subcontractor

NOTE: Contractor's electrician to discuss proposed design with Client prior to any works being carried out

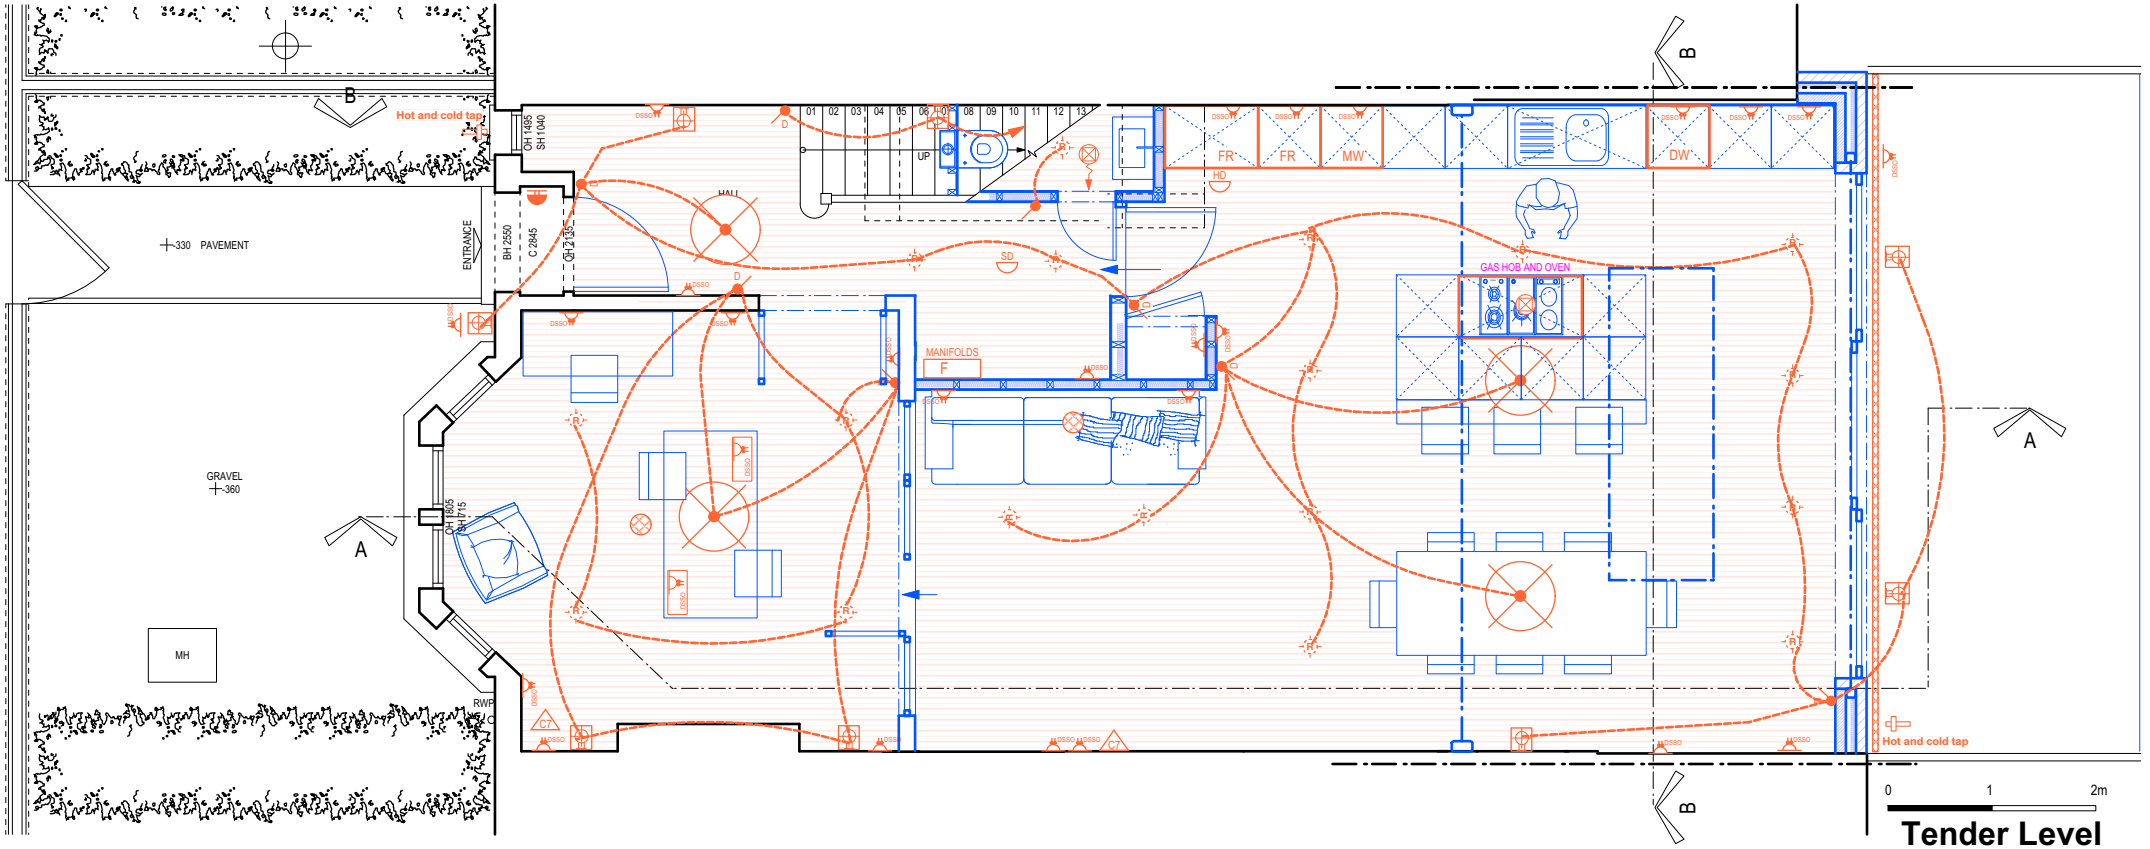

Tender Level

URBANE DESIGN LIMITED
10 BARLEY MOW PASSAGE
UNIT 14.1.02
W44PH

tel: 020 8996 0601
mobile: 07595998460
email: robert@urbanedesignarchitects.com

Drawing name: M&E: Ground Floor Plan & Site Plan			
Date: Nov 2023	Job no: 2023-40	Drawing no: ME01	
Scale: 1:50 @ A3	Revision: -	Drawn by: RDS	
Project name: 92 Woodstock Road W4 1EG			

URBANE DESIGN

All dimensions are in millimetres
All dimensions to be checked on site
© URBANE DESIGN LTD